



#### Correlation of

#### Modern Automotive Technology, by Duffy

(Goodheart-Willcox Publisher ©2017)


to

#### NATEF Automobile Service Technology (AST) Task List Correlation Chart

The following chart correlates the *Modern*Automotive Technology textbook (©2017) to the
2017 NATEF Automobile Service Technology
(AST) Task List.

The correlation below lists the tasks, priority levels, and the corresponding page numbers from the *Modern Automotive Technology* textbook for the Automobile Service Technology Task List.

For more information on NATEF standards, including additional information on the ASE Industry Education Alliance, please visit http://www.asealliance.org/.

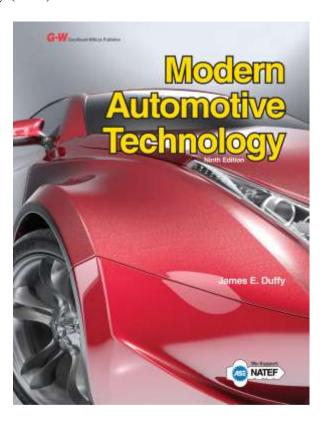

#### **ENGINE REPAIR**

For every task in Engine Repair, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
I. ENGINE REPAIR		
A. General: Engine Diagnosis; Removal and Reinstallation (R &	& R)	
1. Complete work order to include customer information, vehicle	P-1	114–115
identifying information, customer concern, related service history,		
cause, and correction.		

Task Number and Description	Priority	Page #s
2. Research applicable vehicle and service information, including	P-1	109–114
fluid type, internal engine operation, vehicle service history,		
service precautions, and technical service bulletins.		
3. Verify operation of the instrument panel engine warning	P-1	302–307, 381–390,
indicators.		399–411, 415–428,
		620–623, 1003–
		1020
4. Inspect engine assembly for fuel, oil, coolant, and other leaks;	P-1	137, 141–146, 150–
determine needed action.		151, 705–716, 735,
		745, 755, 764, 766,
		860–865, 873–877,
		879, 912–920,
		1028, 1289, 1325–
		1328, 1333
5. Install engine covers using gaskets, seals, and sealers as	P-1	1179–1182
required.		
6. Verify engine mechanical timing.	P-1	235–238, 1176–
		1179, 1183–1189
7. Perform common fastener and thread repair, to include: remove	P-2	126–128
broken bolt, restore internal and external threads with thread		
insert.		
8. Inspect, remove, and/or replace engine mounts.	P-2	1050–1051
9. Identify service precautions related to service of the internal	P-2	82, 454–458
combustion engine of a hybrid vehicle.		
I. ENGINE REPAIR		•
B. Cylinder Head and Valve Train Diagnosis and Repair		
1. Remove cylinder head; inspect gasket condition; install	P-1	1073–1074, 1197–
cylinder head and gasket; tighten according to manufacturer's		1200
specification and procedure.		
2. Clean and visually inspect a cylinder head for cracks; check	P-1	1137–1141
gasket surface areas for warpage and surface finish; check		
passage condition.		
3. Inspect pushrods, rocker arms, rocker arm pivots and shafts for	P-2	1040–1042, 1168–
wear, bending, cracks, looseness, and blocked oil passages		1170, 1388–1389
(orifices); determine needed action.		
4. Adjust valves (mechanical or hydraulic lifters).	P-1	1170

Task Number and Description	Priority	Page #s
5. Inspect and replace camshaft and drive belt/chain; includes	P-1	150, 1039–1040,
checking drive gear wear and backlash, end play, sprocket and		1043, 1165–1168
chain wear, overhead cam drive sprocket(s), drive belt(s), belt		
tension, tensioners, camshaft reluctor ring/tone-wheel, and valve		
timing components; verify correct camshaft timing.		
6. Establish camshaft position sensor indexing.	P-1	596
I. ENGINE REPAIR		
C. Engine Block Assembly Diagnosis and Repair		
1. Remove, inspect, and/or replace crankshaft vibration damper	P-2	1050
(harmonic balancer).		
I. ENGINE REPAIR		
D. Lubrication and Cooling Systems Diagnosis and Repair		
1. Perform cooling system pressure and dye tests to identify leaks;	P-1	863–865, 875, 884,
check coolant condition and level; inspect and test radiator		888–889
pressure cap, coolant recovery tank, heater core, and galley plugs;		
determine needed action.		
2. Identify causes of engine overheating.	P-1	865–867
3. Inspect, replace, and/or adjust drive belts, tensioners, and	P-1	1188
pulleys; check pulley and belt alignment.		
4. Inspect and test coolant; drain and recover coolant; flush and	P-1	112, 144, 879–882,
refill cooling system; use proper fluid type per manufacturer		884
specification; bleed air as required.		
5. Inspect, remove, and replace water pump.	P-2	867–869
6. Remove and replace radiator.	P-2	876–877
7. Remove, inspect, and replace thermostat and gasket/seal.	P-1	870–873
8. Inspect and test fan(s), fan clutch (electrical or mechanical), fan	P-1	877–879
shroud, and air dams; determine needed action.		
9. Perform oil pressure tests; determine needed action.	P-1	915–917
10. Perform engine oil and filter change; use proper fluid type per	P-1	112, 138–141
manufacturer specification.		
11. Inspect auxiliary coolers; determine needed action.	P-3	883–884
12. Inspect, test, and replace oil temperature and pressure	P-2	364–365, 925
switches and sensors.		

#### **AUTOMATIC TRANSMISSION AND TRANSAXLE**

For every task in Automatic Transmission and Transaxle, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
II. AUTOMATIC TRANSMISSION AND TRANSAXLE		
A. General: Transmission and Transaxle Diagnosis		
1. Identify and interpret transmission/transaxle concerns,	P-1	1325–1331, 1427–
differentiate between engine performance and		1428, 1443–1447
transmission/transaxle concerns; determine needed action.		
2. Research vehicle service information including fluid type,	P-1	109–114, 138, 141–
vehicle service history, service precautions, and technical service		142
bulletins.		
3. Diagnose fluid loss and condition concerns; determine needed	P-1	141–142, 1327–
action.		1328, 1331–1333
4. Check fluid level and condition in a transmission or a transaxle	P-1	141–142, 1327–
equipped with a dipstick.		1328
5. Check fluid level and condition in a transmission or a transaxle	P-1	142, 1327–1328
not equipped with a dipstick.		
6. Perform a stall test; determine needed action.	P-2	1329
7. Perform lock-up converter system tests; determine needed	P-3	_
action.		
8. Diagnose transmission/transaxle gear reduction/multiplication	P-1	1317
concerns using driving, driven, and held member (power flow)		
principles.		
9. Diagnose pressure concerns in a transmission using hydraulic	P-2	1312, 1314
principles (Pascal's law).		
10. Demonstrate knowledge of pressure test including	P-3	1329, 1331
transmissions/transaxles equipped with electronic pressure		
control.		
11. Diagnose electronic transmission/transaxle control systems	P-2	302–308, 403–411,
using appropriate test equipment and service information.		1331
II. AUTOMATIC TRANSMISSION AND TRANSAXLE	<u>'</u>	
B. In-Vehicle Transmission/Transaxle Maintenance and Repair	•	
1. Inspect, adjust, and/or replace external manual valve shift	P-1	1333–1334
linkage, transmission range sensor/switch, and/or park/neutral		
position switch.		

Task Number and Description	Priority	Page #s
2. Inspect for leakage; replace external seals, gaskets, and	P-2	129–133, 138, 141–
bushings.		142, 1327–1328,
		1331–1333, 1439
3. Inspect, test, adjust, repair, and/or replace electrical/electronic	P-1	415–428
components and circuits including computers, solenoids, sensors,		
relays, terminals, connectors, switches, and harnesses;		
demonstrate understanding of relearn procedures.		
4. Drain and replace fluid and filter(s); use proper fluid type per	P-1	112, 138, 141–142,
manufacturer specification.		1327–1328, 1331–
		1333
5. Inspect, replace, and align power train mounts.	P-2	1290–1295, 1358–
		1359, 1438
II. AUTOMATIC TRANSMISSION AND TRANSAXLE		•
C. Off-Vehicle Transmission and Transaxle Repair		
1. Remove and reinstall transmission/transaxle and torque	P-2	1215, 1335, 1338–
converter; inspect engine core plugs, rear crankshaft seal, dowel		1340
pins, dowel pin holes, and mating surfaces.		
2. Inspect, leak test, flush, and/or replace transmission/transaxle	P-1	138, 144, 860–861,
oil cooler, lines, and fittings.		879, 1327–1328,
		1331–1333, 1335–
		1339
3. Inspect converter flex (drive) plate, converter attaching bolts,	P-2	_
converter pilot, converter pump drive surfaces, converter end		
play, and crankshaft pilot bore.		
4. Describe the operational characteristics of a continuously	P-3	1416
variable transmission (CVT).		
5. Describe the operational characteristics of a hybrid vehicle	P-3	437–438, 443–449
drive train.		

#### **MANUAL DRIVE TRAIN AND AXLES**

For every task in Manual Drive Train and Axles, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
III. MANUAL DRIVE TRAIN AND AXLES		
A. General: Drive Train Diagnosis		
1. Identify and interpret drive train concerns; determine needed	P-1	1287–1289, 1298–
action.		1300, 1405–1406
2. Research vehicle and service information including fluid type,	P-1	109–114, 1289,
vehicle service history, service precautions, and technical service		1293, 1394
bulletins.		
3. Check fluid condition; check for leaks; determine needed	P-1	143–144
action.		
4. Drain and refill manual transmission/transaxle and final drive	P-1	112, 143–144,
unit; use proper fluid type per manufacturer specification.		1269, 1430
III. MANUAL DRIVE TRAIN AND AXLES		
B. Clutch Diagnosis and Repair		
1. Diagnose clutch noise, binding, slippage, pulsation, and	P-1	1245–1251
chatter; determine needed action.		
2. Inspect clutch pedal linkage, cables, automatic adjuster	P-1	1246–1256, 1289
mechanisms, brackets, bushing pivots, and springs; determine		
needed action.		
3. Inspect and/or replace clutch pressure plate assembly clutch	P-1	1253–1257
disc, release (throw-out) bearing, linkage, and pilot bearing		
bushing (as applicable).		
4. Bleed clutch hydraulic system.	P-1	1256
5. Check and adjust clutch master cylinder fluid level; check for	P-1	112, 145–146
leaks; use proper fluid type per manufacturer specification.		
6. Inspect flywheel and ring gear for wear and cracks; determine	P-1	1250, 1254
needed action.		
7. Measure flywheel runout and crankshaft end play; determine	P-2	1050, 1114, 1116
needed action.		
8. Describe the operation and service of a system that uses a dual	P-3	_
mass flywheel.		

Task Number and Description	Priority	Page #s
III. MANUAL DRIVE TRAIN AND AXLES		
C. Transmission/Transaxle Diagnosis and Repair		
1. Inspect, adjust, lubricate, and/or replace shift linkages,	P-2	1289–1295, 1431
brackets, bushings, cables, pivots, and levers.		
2. Describe the operational characteristics of an electronically	P-2	1280, 1282
controlled manual transmission/transaxle.		
III. MANUAL DRIVE TRAIN AND AXLES		
D. Drive Shaft and Half Shaft, Universal and Constant-Velocity	(CV) Joint Diagnos	is and Repair
(Front, Rear, All-Wheel, Four-Wheel Drive)		
1. Diagnose constant-velocity (CV) joint noise and vibration	P-1	1347
concerns; determine needed action.		
2. Diagnose universal joint noise and vibration concerns;	P-2	1360–1361
determine needed action.		
3. Inspect, remove, and/or replace bearings, hubs, and seals.	P-1	1254–1255, 1292–
		1295, 1389, 1382
4. Inspect, service, and/or replace shaft yokes, boots, and	P-1	1360–1362
universal/CV joints.		
5. Check shaft balance and phasing; measure shaft runout;	P-2	1359
measure and adjust driveline angles.		
III. MANUAL DRIVE TRAIN AND AXLES		
E. Drive Axle Diagnosis and Repair		
E.1 Ring and pinion Gears and Differential Case Assembly		
1. Clean and inspect differential case; check for leaks; inspect	P-1	1390
housing vent.		
2. Check and adjust differential case fluid level; use proper fluid	P-1	112, 143–144
type per manufacturer specification.		
3. Drain and refill differential case; use proper fluid type per	P-1	112, 144, 1390
manufacturer specification.		
4. Inspect and replace companion flange and/or pinion seal;	P-2	1389
measure companion flange runout.		
E.2 Drive Axles		_
1. Inspect and replace drive axle wheel studs.	P-1	1392, 1394
2. Remove and replace drive axle shafts.	P-1	1390–1391, 1394
3. Inspect and replace drive axle shaft seals, bearings, and	P-2	1391–1392
retainers.		
4. Measure drive axle flange runout and shaft end play; determine	P-2	1394
needed action.		

Task Number and Description	Priority	Page #s
III. MANUAL DRIVE TRAIN AND AXLES		
F. Four-Wheel Drive/All-Wheel Drive Component Diagnosis and	d Repair	
1. Inspect, adjust, and repair shifting controls (mechanical,	P-3	1353–1354, 1363–
electrical, and vacuum), bushings, mounts, levers, and brackets.		1364, 1394–1400
2. Inspect locking hubs; determine needed action.	P-3	1379, 1387–1394
3. Check for leaks at drive assembly and transfer case seals; check	P-3	112, 143, 147,
vents; check fluid level; use proper fluid type per manufacturer		1360–1363
specification.		
4. Identify concerns related to variations in the tire circumference	P-2	_
and/or final drive ratios.		

#### SUSPENSION AND STEERING

For every task in Suspension and Steering, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
-	11101111	1 age πs
IV. SUSPENSION AND STEERING		
A. General: Suspension and Steering Systems		
1. Research vehicle service information, including fluid type,	P-1	109–114, 1568,
vehicle service history, service precautions, and technical service		1747
bulletins.		
2. Identify and interpret suspension and steering system concerns;	P-2	1513–1529, 1561–
determine needed action.		1574
IV. SUSPENSION AND STEERING		
B. Steering Systems Diagnosis and Repair		
1. Disable and enable supplemental restraint system (SRS); verify	P-1	1747–1748
indicator lamp operation.		
2. Remove and replace steering wheel; center/time supplemental	P-1	1565
restraint system (SRS) coil (clock spring).		
3. Diagnose steering column noises, looseness, and binding	P-2	150, 1562–1563
concerns (including tilt/telescoping mechanisms); determine		
needed action.		
4. Diagnose power steering gear (non–rack-and-pinion) binding,	P-2	1561–1562
uneven turning effort, looseness, hard steering, and noise		
concerns; determine needed action.		
5. Diagnose power steering gear (rack-and-pinion) binding,	P-2	1562–1563, 1567
uneven turning effort, looseness, hard steering, and noise		
concerns; determine needed action.		

Task Number and Description	Priority	Page #s
6. Inspect steering shaft universal-joint(s), flexible coupling(s),	P-2	1539, 1544
collapsible column, lock cylinder mechanism, and steering wheel;		
determine needed action.		
7. Remove and replace rack-and-pinion steering gear; inspect	P-2	1568
mounting bushings and brackets.		
8. Inspect rack-and-pinion steering gear; inspect inner tie rod ends	P-1	1566
(sockets) and bellow boots; replace as needed.		
9. Inspect power steering fluid level and condition.	P-1	112, 144, 1563
10. Flush, fill, and bleed power steering system; use proper fluid	P-2	112, 1571
type per manufacturer specification.		
11. Inspect for power steering fluid leakage; determine needed	P-1	1563
action.		
12. Remove, inspect, replace, and/or adjust power steering pump	P-1	1564
drive belt.		
13. Remove and reinstall power steering pump.	P-2	1571
14. Remove and reinstall press fit power steering pump pulley;	P-2	1568–1569
check pulley and belt alignment.		
15. Inspect, remove, and/or replace power steering hoses and	P-2	1542–1543
fittings.		
16. Inspect, remove, and/or replace Pitman arm, relay (center	P-2	1542, 1565–1566
link/intermediate) rod, idler arm, mountings, and steering linkage		
damper.		
17. Inspect, replace, and/or adjust tie rod ends (sockets), tie rod	P-1	1566
sleeves, and clamps.		
18. Identify hybrid vehicle power steering system electrical	P-2	454–458, 1545,
circuits and safety precautions.		1552–1554, 1555–
		1556, 1574
19. Inspect electric power steering assist system.	P-3	1574
IV. SUSPENSION AND STEERING		
C. Suspension Systems Diagnosis and Repair		
1. Diagnose short and long arm suspension system noises, body	P-1	1513–1514, 1516,
sway, and uneven ride height concerns; determine needed action.		1536
2. Diagnose strut suspension system noises, body sway, and	P-1	1513–1514, 1516,
uneven ride height concerns; determine needed action.		1536
3. Inspect, remove, and/or replace upper and lower control arms,	P-3	1522–1524
bushings, shafts, and rebound bumpers.		
4. Inspect, remove, and/or replace strut rods and bushings.	P-3	1525
5. Inspect, remove, and/or replace upper and/or lower ball joints	P-2	1520–1521
(with or without wear indicators).		
6. Inspect, remove, and/or replace steering knuckle assemblies.	P-3	1492

Task Number and Description	Priority	Page #s
7. Inspect, remove, and/or replace short and long arm suspension	P-3	1517–1518
system coil springs and spring insulators.		
8. Inspect, remove, and/or replace torsion bars and mounts.	P-3	1519–1520
9. Inspect, remove, and/or replace front/rear stabilizer bar (sway	P-3	1499, 1513–1514
bar) bushings, brackets, and links.		
10. Inspect, remove, and/or replace strut cartridge or assembly,	P-3	1517
strut coil spring, insulators (silencers), and upper strut bearing		
mount.		
11. Inspect, remove, and/or replace track bar, strut rods/radius	P-3	1522–1524
arms, and related mounts and bushings.		
12. Inspect rear suspension system leaf spring(s), spring	P-1	1494, 1518–1519
insulators (silencers), shackles, brackets, bushings, center		
pins/bolts, and mounts.		
IV. SUSPENSION AND STEERING		
D. Related Suspension and Steering Service		
1. Inspect, remove, and/or replace shock absorbers; inspect	P-1	1514–1516
mounts and bushings.		
2. Remove, inspect, service, and/or replace front and rear wheel	P-1	1480–1484
bearings.		
3. Describe the functions of suspension and steering control	P-3	1506–1509, 1653–
systems and components, (i.e. active suspension and stability		1654, 1660–1662
control).		
IV. SUSPENSION AND STEERING		
E. Wheel Alignment Diagnosis, Adjustment, and Repair		
1. Diagnose vehicle wander, drift, pull, hard steering, bump steer,	P-1	1581–1589
memory steer, torque steer, and steering return concerns;		
determine needed action.		
2. Perform prealignment inspection; measure vehicle ride height;	P-1	1585–1589
determine needed action.		
3. Prepare vehicle for wheel alignment on alignment machine;	P-1	1589–1595
perform four-wheel alignment by checking and adjusting front		
and rear wheel caster, camber, and toe as required; center steering		
wheel.		
4. Check toe-out-on-turns (turning radius); determine needed	P-1	1592
action.		
5. Check steering axis inclination (SAI) and included angle;	P-2	1585
determine needed action.		
6. Check rear wheel thrust angle; determine needed action.	P-1	1591
7. Check for front wheel setback; determine needed action.		

Task Number and Description	Priority	Page #s
8. Check front and/or rear cradle (subframe) alignment; determine	P-3	1588–1589
needed action.		
9. Reset steering angle sensor.	P-2	1574, 1661
IV. SUSPENSION AND STEERING		
F. Wheels and Tires Diagnosis and Repair		
1. Inspect tire condition; identify tire wear patterns; check for	P-1	1449–1455, 1467–
correct tire size, application (load and speed ratings), and air		1470, 1472
pressure as listed on the tire information placard/label.		
2. Diagnose wheel/tire vibration, shimmy, and noise; determine	P-2	1470–1471, 1474,
needed action.		1513
3. Rotate tires according to manufacturer's recommendation	P-1	1455, 1472, 1479–
including vehicles equipped with tire pressure monitoring systems		1480
(TPMS).		
4. Measure wheel, tire, axle flange, and hub runout; determine	P-2	1474
needed action.		
5. Diagnose tire pull problems; determine needed action.	P-1	1470
6. Dismount, inspect, and remount tire on wheel; balance wheel	P-1	1474–1478
and tire assembly.		
7. Dismount, inspect, and remount tire on wheel equipped with	P-1	1476–1480
tire pressure monitoring system sensor.		
8. Inspect tire and wheel assembly for air loss; determine needed	P-1	1478
action.		
9. Repair tire following vehicle manufacturer approved	P-1	1467–1471, 1478
procedure.		
10. Identify indirect and direct tire pressure monitoring systems	P-1	1479–1480
(TPMS); calibrate system; verify operation of instrument panel		
lamps.		
11. Demonstrate knowledge of steps required to remove and	P-1	1479–1480
replace sensors in a tire pressure monitoring system (TPMS)		
including relearn procedure.		

#### **BRAKES**

For every task in Brakes, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
V. BRAKES		<u> </u>
A. General: Brake System Diagnosis		
1. Identify and interpret brake system concerns; determine needed	P-1	1625–1630
action.		
2. Research vehicle service information including fluid type,	P-1	109–114
vehicle service history, service precautions, and technical service		
bulletins.		
3. Describe procedure for performing a road test to check brake	P-1	1625, 1669
system operation including an anti-lock brake system (ABS).		
4. Install wheel and torque lug nuts.	P-1	1473
V. BRAKES		1
B. Hydraulic System Diagnosis and Repair		
Diagnose pressure concerns in the brake system using	P-1	1603–1604
hydraulic principles (Pascal's law).		
2. Measure brake pedal height, travel, and free play (as	P-1	1628
applicable); determine needed action.		
3. Check master cylinder for internal/external leaks and proper	P-1	1631
operation; determine needed action.		
4. Remove, bench bleed, and reinstall master cylinder.	P-1	1631–1638
5. Diagnose poor stopping, pulling, or dragging concerns caused	P-3	1625–1628
by malfunctions in the hydraulic system; determine needed		
action.		
6. Inspect brake lines, flexible hoses, and fittings for leaks, dents,	P-1	1628–1630
kinks, rust, cracks, bulging, wear, and loose fittings/supports;		
determine needed action.		
7. Replace brake lines, hoses, fittings, and supports.	P-2	1634
8. Fabricate brake lines using proper material and flaring	P-2	1634, 1636
procedures (double flare and ISO types).		
9. Select, handle, store, and fill brake fluids to proper level; use	P-1	145, 1628–1629
proper fluid type per manufacturer specification.		
10. Inspect, test, and/or replace components of brake warning	P-3	603–605, 612–613,
light system.		1627
11. Identify components of hydraulic brake warning light system.	P-2	603–605, 612–613,
		1627

Task Number and Description	Priority	Page #s
12. Bleed and/or flush brake system.	P-1	1631–1634
13. Test brake fluid for contamination.	P-1	145, 1628–1629
V. BRAKES		
C. Drum Brake Diagnosis and Repair		
1. Diagnose poor stopping, noise, vibration, pulling, grabbing,	P-1	1625–1628
dragging, or pedal pulsation concerns; determine needed action.		
2. Remove, clean, and inspect brake drum; measure brake drum	P-1	1643
diameter; determine serviceability.		
3. Refinish brake drum and measure final drum diameter;	P-1	1643–1645
compare with specification.		
4. Remove, clean, inspect, and/or replace brake shoes, springs,	P-1	1645–1648
pins, clips, levers, adjusters/self-adjusters, other related brake		
hardware, and backing support plates; lubricate and reassemble.		
5. Inspect wheel cylinders for leaks and proper operation; remove	P-2	1643
and replace as needed.		
6. Pre-adjust brake shoes and parking brake; install brake drums	P-1	1648–1649
or drum/hub assemblies and wheel bearings; perform final checks		
and adjustments.		
V. BRAKES		
D. Disc Brake Diagnosis and Repair		
1. Diagnose poor stopping, noise, vibration, pulling, grabbing,	P-1	1625–1630
dragging, or pulsation concerns; determine needed action.		
2. Remove and clean caliper assembly; inspect for leaks, damage,	P-1	1637–1638
and wear; determine needed action.		
3. Inspect caliper mounting and slides/pins for proper operation,	P-1	_
wear, and damage; determine needed action.		
4. Remove, inspect, and/or replace brake pads and retaining	P-1	1629, 1634, 1636
hardware; determine needed action.		
5. Lubricate and reinstall caliper, brake pads, and related	P-1	1637–1638
hardware; seat brake pads; inspect for leaks.		
6. Clean and inspect rotor and mounting surface; measure rotor	P-1	1638–1642
thickness, thickness variation, and lateral runout; determine		
needed action.		
7. Remove and reinstall/replace rotor.	P-1	1641–1642
8. Refinish rotor on a vehicle; measure final rotor thickness and	P-1	1640–1641
compare with specification.		
9. Refinish rotor off vehicle; measure final rotor thickness and	P-1	1639–1640
compare with specification.		
10. Retract and re-adjust caliper piston on an integrated parking	P-2	1637–1638
brake.		

Task Number and Description	Priority	Page #s
11. Check brake pad wear indicator; determine needed action.	P-1	1627–1628
12. Describe importance of operating vehicle to burnish/break-in	P-1	1636
replacement brake pads according to manufacturer's		
recommendations.		
V. BRAKES		
E. Power-Assist Units Diagnosis and Repair		
1. Check brake pedal travel with and without engine running to	P-2	1628
verify proper power booster operation.		
2. Identify components of the brake power assist system (vacuum	P-1	1630
and hydraulic); check vacuum supply (manifold or auxiliary		
pump) to vacuum-type power booster.		
3. Inspect vacuum-type power booster unit for leaks; inspect the	P-1	1630
check-valve for proper operation; determine needed action.		
4. Inspect and test hydraulically assisted power brake system for	P-3	1630
leaks and proper operation.		
5. Measure and adjust master cylinder pushrod length.	P-3	1631
V. BRAKES		- 1
F. Related Systems (i.e., Wheel Bearings, Parking Brakes, Electric	al) Diagnosis ar	nd Repair
1. Diagnose wheel bearing noises, wheel shimmy, and vibration	P-2	1470–1471, 1480
concerns; determine needed action.		
2. Remove, clean, inspect, repack, and install wheel bearings;	P-2	1480, 1482–1483
replace seals; install hub and adjust bearings.		
3. Check parking brake system components for wear, binding, and	P-1	1629, 1649
corrosion; clean, lubricate, adjust, and/or replace as needed.		
4. Check parking brake operation and parking brake indicator	P-1	603–605, 612–613,
light system operation; determine needed action.		1627, 1629, 1649
5. Check operation of brake stop light system.	P-1	1480–1483
6. Replace wheel bearing and race.	P-3	1484
7. Inspect and replace wheel studs.	P-1	1392, 1394
8. Remove, reinstall, and/or replace sealed wheel bearing	P-1	1484
assembly.		
V. BRAKES		1
G. Electronic Brake Control Systems: Antilock Brake (ABS), Trac	ction Control (T	CS), and Electronic
Stability Control (ESC) Systems Diagnosis and Repair		
Identify and inspect electronic brake control system	P-1	1653–1659, 1662–
components (ABS, TCS, ESC); determine needed action.		1663
2. Describe the operation of a regenerative braking system.	P-3	1660–1661

#### **ELECTRICAL/ELECTRONIC SYSTEMS**

For every task in Electrical/Electronic Systems, the following safety requirement must be strictly enforced:

·		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
A. General: Electrical System Diagnosis		
Research applicable vehicle and service information including	P-1	109–114
vehicle service history, service precautions, and technical service		
bulletins.		
2. Demonstrate knowledge of electrical/electronic series, parallel,	P-1	266–268
and series-parallel circuits using principles of electricity (Ohm's		
law).		
3. Demonstrate proper use of a digital multimeter (DMM) when	P-1	305, 355–362
measuring source voltage, voltage drop (including grounds), and		
current flow resistance.		
4. Demonstrate knowledge of the causes and effects from shorts,	P-1	349–352
grounds, opens, and resistance problems in electrical/electronic		
circuits.		
5. Demonstrate proper use of a test light on an electrical circuit.	P-1	353–354
6. Use fused jumper wires to check operation of electrical circuits.	P-1	352–353
7. Use wiring diagrams during the diagnosis (troubleshooting) of	P-1	327–342, 1716–
electrical/electronic circuit problems.		1718
8. Diagnose the cause(s) of excessive key-off battery drain	P-1	494
(parasitic draw); determine needed action.		
9. Inspect and test fusible links, circuit breakers, and fuses;	P-1	283–284, 326–327,
determine needed action.		365
10. Inspect, test, repair, and/or replace components, connectors,	P-1	317–327, 334, 419–
terminals, harnesses, and wiring in electrical/electronic systems		424
(including solder repairs); determine needed action.		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
B. Battery Diagnosis Service		
1. Perform battery state-of-charge test; determine needed action.	P-1	492
2. Confirm proper battery capacity for vehicle application;	P-1	497–498
perform battery capacity and load test; determine needed action.		
3. Maintain or restore electronic memory functions.	P-1	425
4. Inspect and clean battery; fill battery cells; check battery	P-1	499, 527–528
cables, connectors, clamps, and hold-downs.		
5. Perform slow/fast battery charge according to manufacturer's	P-1	494
recommendations.		

Task Number and Description	Priority	Page #s
6. Jump-start vehicle using jumper cables and a booster battery or	P-1	496–497
an auxiliary power supply.		
7. Identify safety precautions for high voltage systems on electric,	P-2	438, 454–458, 499–
hybrid-electric, and diesel vehicles.		506
8. Identify electrical/electronic modules, security systems, radios,	P-1	410, 411,992, 1748
and other accessories that require reinitialization or code entry		
after reconnecting vehicle battery.		
9. Identify hybrid vehicle auxiliary (12V) battery service, repair,	P-2	478, 500
and test procedures.		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
C. Starting System Diagnosis and Repair		
1. Perform starter current draw test; determine needed action.	P-1	525–526
2. Perform starter circuit voltage drop tests; determine needed	P-1	526–527
action.		
3. Inspect and test starter relays and solenoids; determine needed	P-2	528–529
action.		
4. Remove and install starter in a vehicle.	P-1	530, 532
5. Inspect and test switches, connectors, and wires of starter	P-2	529–530
control circuits; determine needed action.		
6. Differentiate between electrical and engine mechanical	P-2	524
problems that cause a slow-crank or no-crank condition.		
7. Demonstrate knowledge of automatic idle-stop/start-stop	P-2	438–439
system.		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
D. Charging System Diagnosis and Repair		
1. Perform charging system output test; determine needed action.	P-1	553–558
2. Diagnose (troubleshoot) charging system for causes of	P-1	563–564
undercharge, no-charge, or overcharge conditions.		
3. Inspect, adjust, and/or replace generator (alternator) drive belts;	P-1	552–553, 558–559
check pulleys and tensioners for wear; check pulley and belt		
alignment.		
4. Remove, inspect, and/or replace generator (alternator).	P-1	558–559
5. Perform charging circuit voltage drop tests; determine needed	P-1	526–527
action.		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
E. Lighting Systems Diagnosis and Repair		
1. Diagnose (troubleshoot) the causes of brighter-than-normal,	P-1	635
intermittent, dim, or no light operation; determine needed action.		

Task Number and Description	Priority	Page #s
2. Inspect interior and exterior lamps and sockets including	P-1	613–616
headlights and auxiliary lights (fog lights/driving lights); replace		
as needed.		
3. Aim headlights.	P-2	616–617
4. Identify system voltage and safety precautions associated with	P-2	607, 615
high-intensity discharge headlights.		
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
F. Instrument Cluster and Driver Information Systems Diagnos	sis and Repair	
1. Inspect and test gauges and gauge sending units for causes of	P-2	622–623, 883, 925
abnormal readings; determine needed action.		
2. Diagnose (troubleshoot) the causes of incorrect operation of	P-2	925
warning devices and other driver information systems; determine		
needed action.		
3. Reset maintenance indicators as required.	P-2	400–401, 410, 620
VI. ELECTRICAL/ELECTRONIC SYSTEMS		
G. Body Electrical Systems Diagnosis and Repair		
1. Describe operation of comfort and convenience accessories and	P-3	608, 644–655, 665–
related circuits (such as: power window, power seats, pedal		666, 669–671
height, power locks, truck locks, remote start, moonroof, sunroof,		
sunshade, remote keyless entry, voice activation, steering wheel		
controls, back-up camera, park assist, cruise control, and auto-		
dimming headlamps); determine needed repairs.		
2. Describe operations of security/anti-theft systems and related	P-3	663–668, 672–674
circuits (such as: theft deterrent, door locks, remote keyless entry,		
remote start, and starter/fuel disable); determine needed repairs.		
3. Describe operation of entertainment and related circuits (such	P-3	637–644
as: radio, DVD, remote CD changer, navigation, amplifiers,		
speakers, antennas, and voice-activated accessories); determine		
needed repairs.		
4. Describe operation of safety systems and related circuits (such	P-3	627-632, 669-671,
as: horns, airbags, seat belt pretensioners, occupancy		1726–1736, 1741–
classification, wipers, washers, speed control/collision avoidance,		1748
heads-up display, park assist, and back-up camera); determine		
needed repairs.		
5. Describe body electronic systems circuits using a scan tool;	P-3	400–410
check for module.		
6. Describe the process for software transfer, software updates, or	P-3	424–428
reprogramming.		

### **HEATING AND AIR CONDITIONING (HVAC)**

For every task in Heating and Air Conditioning (HVAC), the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
VII. HEATING AND AIR CONDITIONING (HVAC)		•
A. General: A/C System Diagnosis and Repair		
1. Identify and interpret heating and air conditioning problems;	P-1	1697, 1722–1723
determine needed action.		
2. Research vehicle service information including refrigerant/oil	P-1	109–114
type, vehicle service history, service precautions, and technical		
service bulletins.		
3. Performance test A/C system; identify problems.	P-1	1702–1706
4. Identify abnormal operating noises in the A/C system;	P-2	1709
determine needed action.		
5. Identify refrigerant type; select and connect proper gauge	P-1	1699, 1701–1706
set/test equipment; record temperature and pressure readings.		
6. Leak test A/C system; determine needed action.	P-1	1706–1707
7. Inspect condition of refrigerant oil removed from A/C system;	P-2	_
determine needed action.		
8. Determine recommended oil and oil capacity for system	P-1	1714
application.		
9. Using a scan tool, observe and record related HVAC data and	P-3	860–861, 1697–
trouble codes.		1698
VII. HEATING AND AIR CONDITIONING (HVAC)		
B. Refrigeration System Component Diagnosis and Repair		
1. Inspect, remove, and/or replace A/C compressor drive belts,	P-1	1709–1710
pulleys, and tensioners; visually inspect A/C components for		
signs of leaks; determine needed action.		
2. Inspect, test, service, and/or replace A/C compressor clutch	P-2	1709–1710
components and/or assembly; check compressor clutch air gap;		
adjust as needed.		
3. Remove, inspect, and reinstall A/C compressor and mountings;	P-2	1710
determine recommended oil type and quantity.		
4. Identify hybrid vehicle A/C system electrical circuits and	P-2	462
service/safety precautions.		
5. Determine need for additional A/C system filter; determine	P-3	
needed action.		

Task Number and Description	Priority	Page #s
6. Remove and inspect A/C system mufflers, hoses, lines, fittings,	P-2	1701–1702
O-rings, seals, and service valves; determine needed action.		
7. Inspect for proper A/C condenser airflow; determine needed	P-1	1710
action.		
8. Remove, inspect, and reinstall receiver/driver or	P-2	112, 1710
accumulator/drier; determine recommended oil type and quantity.		
9. Remove, inspect, and install expansion valve or orifice	P-1	1710
(expansion) tube.		
10. Inspect evaporator housing water drain; determine needed	P-1	1708
action.		
11. Determine procedure to remove and reinstall evaporator;	P-2	1708
determine required oil type and quantity.		
VII. HEATING AND AIR CONDITIONING (HVAC)		
C. Heating, Ventilation, and Engine Cooling System Diagnosis a	and Repair	
1. Inspect engine cooling and heater systems hoses and pipes;	P-1	1710, 1714
determine needed action.		
2. Inspect and test heater control valve(s); determine needed	P-2	1714
action.		
3. Determine procedure to remove, inspect, reinstall, and/or	P-2	1687, 1715
replace heater core.		
VII. HEATING AND AIR CONDITIONING (HVAC)		
D. Operating Systems and Related Control Diagnosis and Repa	ir	
1. Inspect and test HVAC system blower motors, resistors,	P-1	1714–1717
switches, relays, wiring, and protection devices; determine needed		
action.		
2. Diagnose HVAC system clutch control systems; determine	P-2	1709
needed action.		
3. Diagnose malfunctions in the vacuum, mechanical, and	P-2	1708–1710, 1714–
electrical components and controls of the heating, ventilation, and		1716
A/C (HVAC) system; determine needed action.		
4. Inspect and test HVAC system control panel assembly;	P-2	1716–1717
determine needed action.		
5. Inspect and test HVAC system control cables, motors, and	P-3	325–327, 1716–
linkages; determine needed action.		1717
6. Inspect HVAC system ducts, doors, houses, cabin filters, and	P-1	146–147
outlets; determine needed action.		
7. Identify the source of HVAC system odors.	P-2	1708
8. Check the operation of automatic or semiautomatic HVAC	P-2	1716–1717
control systems; determine needed action.		

Task Number and Description	Priority	Page #s
VII. HEATING AND AIR CONDITIONING (HVAC)		
E. Refrigerant Recovery, Recycling, and Handling		
1. Perform correct use and maintenance of refrigerant handling	P-1	152–153, 1699–
equipment according to equipment manufacturer's standards.		1701, 1707–1708,
		1711, 1714
2. Identify A/C system refrigerant; test for sealants; recover,	P-1	1675, 1699–1701,
evacuate, and charge A/C system; add refrigerant oil as required.		1707–1708
3. Recycle, label, and store refrigerant.	P-1	152–153, 1699–
		1701, 1707–1708,
		1711, 1714

#### **ENGINE PERFORMANCE**

For every task in Engine Performance, the following safety requirement must be strictly enforced:

Task Number and Description	Priority	Page #s
VIII. ENGINE PERFORMANCE		
A. General: Engine Diagnosis		
1. Identify and interpret engine performance concerns; determine	P-1	114–115, 988–999
needed action.		
2. Research vehicle service information, including vehicle service	P-1	109–114, 989–990
history, service precautions, and technical service bulletins.		
3. Diagnose abnormal engine noises or vibration concerns;	P-3	151, 684–685, 994,
determine needed action.		996, 1026, 1028,
		1036–1037, 1040,
		1042, 1047–1051
4. Diagnose the cause of excessive oil consumption, coolant	P-2	1026–1028
consumption, unusual exhaust color, odor, and sound; determine		
needed action.		
5. Perform engine absolute manifold pressure test	P-1	997, 1034
(vacuum/boost); determine needed action.		
6. Perform cylinder power balance test; determine needed action.	P-2	1034–1035
7. Perform cylinder cranking and running compression tests;	P-1	1029–1034, 1055–
determine needed action.		1056
8. Perform cylinder leakage test; determine needed action.	P-1	1034
9. Diagnose engine mechanical, electrical, electronic, fuel, and	P-2	991–997, 1026–
ignition concerns; determine needed action.		1035

Task Number and Description	Priority	Page #s
10. Verify engine operating temperature; determine needed	P-1	837–838
action.		
11. Verify correct camshaft timing including variable valve	P-1	190–191, 209–210,
timing (VVT) systems.		1175–1179
VIII. ENGINE PERFORMANCE	l	
B. Computerized Controls Diagnosis and Repair		
1. Retrieve and record diagnostic trouble codes (DTC), OBD	P-1	403–411, 415–416,
monitor status, and freeze frame data; clear codes when		994
applicable.		
2. Access and use service information to perform step-by-step	P-1	109–114, 348–349
(troubleshooting) diagnosis.		
3. Perform active tests of actuators using a scan tool; determine	P-2	409–410, 417, 1004
needed action.		
4. Describe the use of OBD monitors for repair verification.	P-1	400, 747–748, 952–
		953
VIII. ENGINE PERFORMANCE		
C. Ignition System Diagnosis and Repair		
1. Diagnose (troubleshoot) ignition system related problems, such	P-2	586, 600–601
as no-starting, hard starting, engine misfire, poor driveability,		
spark knock, power loss, poor mileage, and emissions concerns;		
determine needed action.		
2. Inspect and test crankshaft and camshaft position sensor(s);	P-1	594–596
determine needed action.		
3. Inspect, test, and/or replace ignition control module and	P-3	594–595
powertrain/engine control module; reprogram/initialize as needed.		
4. Remove and replace spark plugs; inspect secondary ignition	P-1	586–591
components for wear and damage.		
VIII. ENGINE PERFORMANCE		
D. Fuel, Air Induction, and Exhaust Systems Diagnosis and Rep	pair	
1. Check fuel for contaminants; determine needed action.	P-2	706, 710–711
2. Inspect and test fuel pump(s) and pump control system for	P-1	711–715
pressure, regulation, and volume; determine needed action.		
3. Replace fuel filter(s) where applicable.	P-2	701
4. Inspect, service, or replace air filters, filter housings, and intake	P-1	715–716
duct work.		
5. Inspect throttle body, air induction system, intake manifold,	P-2	1051
and gaskets for vacuum leaks and/or unmetered air.		
6. Inspect, test, and/or replace fuel injectors.	P-2	745–758
7. Verify idle control operation.	P-1	767

Task Number and Description	Priority	Page #s
8. Inspect integrity of the exhaust manifold, exhaust pipes,	P-1	801–802, 1051
muffler(s), catalytic converter(s), resonator(s), tail pipe(s), and		
heat shields; determine needed action.		
9. Inspect condition of exhaust system hangers, brackets, clamps,	P-1	801–805
and heat shields.		
10. Perform exhaust system back-pressure test; determine needed	P-2	802–803
action.		
11. Check and refill diesel exhaust fluid (DEF).	P-2	689
VIII. ENGINE PERFORMANCE		1
E. Emissions Control Systems Diagnosis and Repair		
1. Diagnose oil leaks, emissions, and driveability concerns caused	P-3	968–969, 971–972
by the positive crankcase ventilations (PCV) system; determine		
needed action.		
2. Inspect, test, service, and/or replace positive crankcase	P-2	926, 968–969, 971–
ventilation (PCV) filter/breather, valve, tubes, orifices, and hoses;		972
determine needed action.		
3. Diagnose emissions and driveability concerns caused by the	P-3	968, 972–973
exhaust gas recirculation (EGR) system; inspect, test, service,		
and/or replace electrical/electronic sensors, controls, wiring,		
tubing, exhaust passages, vacuum/pressure controls, filters, and		
hoses of exhaust gas recirculation (EGR) system; determine		
needed action.		
4. Inspect and test electrical/electronically operated components	P-3	973, 975
and circuits of secondary air injection systems; determine needed		
action.		
5. Diagnose emissions and driveability concerns caused by the	P-1	976
catalytic converter system; determine needed action.		
6. Inspect and test components and hoses of evaporative	P-1	972
emissions control (EVAP) system; determine needed action.		
7. Interpret diagnostic trouble codes (DTCs) and scan tool data	P-2	403–410, 958
related to the emissions control systems; determine needed action.		

### **REQUIRED SUPPLEMENTAL TASKS**

Task Number and Description	Page #s
Shop and Personal Safety	
1. Identify general shop safety rules and procedures.	83–84
2. Utilize safe procedures for handling of tools and equipment.	77, 83
3. Identify and use the proper placement of floor jacks and jack stands.	84
4. Identify and use the proper procedures for safe lift operation.	76–77
5. Utilize proper ventilation procedures for working with the lab/shop area.	81
6. Identify marked safety areas.	78
7. Identify the location and the types of fire extinguishers and other fire safety	79–80
equipment; demonstrate the knowledge of the procedures for using fire extinguishers	
and other fire safety equipment.	
8. Identify the location and use of eyewash stations.	83
9. Identify the location of the posted evacuation routes.	78
10. Comply with the required use of safety glasses, ear protection, gloves, and shoes	83
during lab/shop activities.	
11. Identify and wear appropriate clothing for lab/shop activities.	83
12. Secure hair and jewelry for lab/shop activities.	83
13. Demonstrate awareness of the safety aspects of supplemental restraint systems	54, 82, 454–458,
(SRS), electronic brake control systems, and hybrid vehicle high-voltage circuits.	607
14. Demonstrate the awareness of safety aspects of high-voltage circuits (such as high	54, 82, 607
intensity discharge (HID) lamps, ignition systems, injection systems, etc.).	
15. Locate and demonstrate knowledge of material safety data sheets (MSDS).	84–85
Tools and Equipment	
1. Identify tools and their use in automotive applications.	42–54, 59–71
2. Identify standard and metric designation.	89–90
3. Demonstrate safe handling and use of appropriate tools.	42, 51–52, 59–70
4. Demonstrate proper cleaning, storage, and maintenance of tools and equipment.	41–42
5. Demonstrate proper use of precision measuring tools (i.e., micrometer, dial-indicator,	91, 93–97, 106, 880
dial-caliper).	
Preparing Vehicle for Service	
1. Identify information needed and the service requested on a repair order.	114–115
2. Identify purpose and demonstrate proper use of fender covers, mats.	71
3. Demonstrate the three C's (concern, cause, correction).	112
4. Review vehicle service history.	_
5. Complete work order to include customer information, vehicle identifying	114–115
information, customer concern, related service, history, cause, and correction.	
Preparing Vehicle for Customer	

Task Number and Description	Page #s
1. Ensure vehicle is prepared to return to customer per school/company policy (floor	71, 1222
mats, steering wheel cover, etc.)	

# **Workplace Employability Skills**

Task Number and Description	Page #s
Personal Standards	
1. Reports to work daily on time; able to take directions and motivated to accomplish the	157, 230
task at hand.	
2. Dresses appropriately and uses language and manners suitable for the workplace.	159
3. Maintains appropriate personal hygiene.	159
4. Meets and maintains employment eligibility criteria, such as drug/alcohol-free status,	159
clean driving record, etc.	
5. Demonstrates honesty, integrity, and reliability.	159, 230, 296, 342
Work Habits/Ethics	
1. Complies with workplace policies/laws.	1384
2. Contributes to the success of the team, assists others, and requests help when needed.	158–159, 180
3. Works well with all customers and coworkers.	72, 84, 180
4. Negotiates solutions to interpersonal and workplace conflicts.	158
5. Contributes ideas and initiative.	158
6. Follows directions.	158
7. Communicates (written and verbal) effectively with customers and coworkers.	84, 159–160, 180
8. Reads and interprets workplace documents; writes clearly and concisely.	160
9. Analyzes and resolves problems that arise in completing assigned tasks.	158
10. Organizes and implements a productive plan of work.	158–159, 854–855
11. Uses scientific, technical, engineering, and mathematics principles and reasoning to	89–105, 266–272,
accomplish assigned tasks.	316, 347–349, 1603–
	1604
12. Identifies and addresses the needs of all customers, providing helpful, courteous, and	84, 160, 194, 296
knowledgeable service and advice as needed.	